FGD PUMP PROBLEM?

RECIRCULATION PUMPS IN HIGHLY CORROSIVE AND ABRASIVE LIQUIDS.

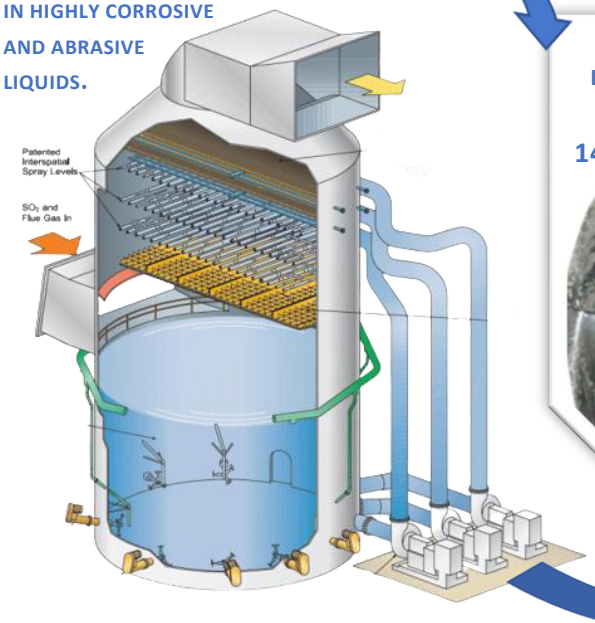

EVEN SUPER DUPLEX FAILS AFTER ONLY 14,000 HOURS!



DECREASED EFFICIENCY WITH WEAR
HIGH OPERATION COSTS
EXPENSIVE REPAIR COSTS
EXPENSIVE REPLACEMENT COSTS

FGD PUMP SOLUTION!

MATRIX ENGINEERED SOLUTIONS

DÜCHTING PUMPEN



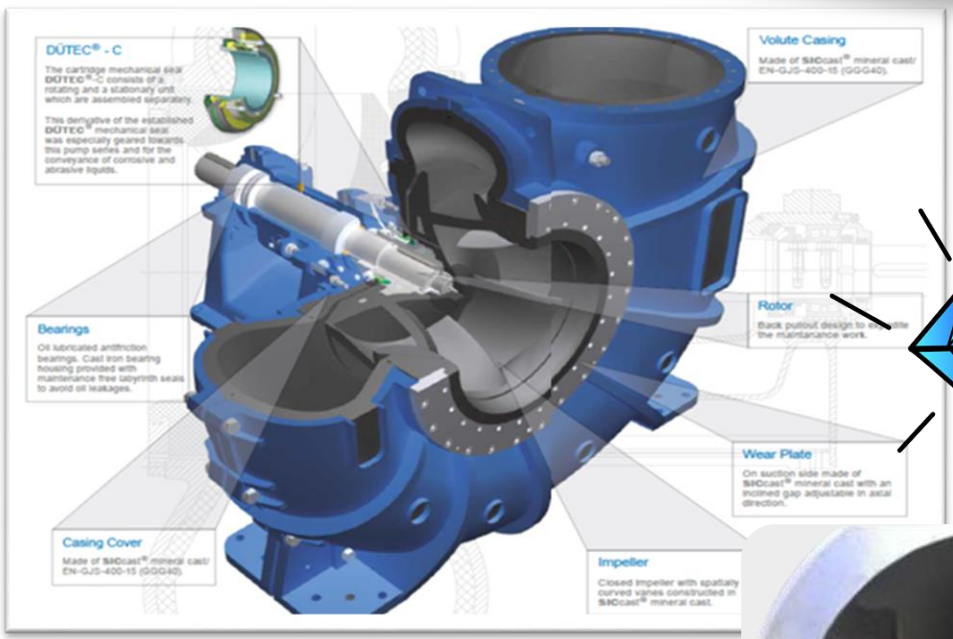

SICast®
Hard as a Diamond



MAX. FLOW	MAX. PRESSURE	MAX. DENSITY	PH - VALUE	MAX. PARTICLE SIZE	MATERIAL	TYPE
20000 m³/h (88000 gpm)	6 bar (90 PSI)	1,700 g/l	0 - 13	2 mm (0,08 inch)	SICast	MCC



OUR VALUABLE CUSTOMERS

SPC 清新环境 · B&W BABCOCK & WILCOX · GEA engineering for a better world · GE · ALSTOM · KC Cottrell · MITSUBISHI POWER · HONDA PUMPS ほんだポンプ